



635nm Laser Module

<1mW, <5mW, <10mW

Red laser, Spot beam, PCB sealed with epoxy

Model: LDM635-A-B-C-D-1-10

* A – power(mW), B – diameter(mm), C – length(mm), D – lens material(P or G)

Features:

- Red dot laser
- Auto power control (APC) driver. Laser output power keeps steady.
- PCB sealed with epoxy, best shock resistance.
- Packaged in a single housing, best protection.
- Compact size.
- More wavelength with this design: 650nm, 850nm

Specifications:

No	Parameters	Value
1	Peak Wavelength	635nm
2	Operation Voltage	3-6V
3	Operation Current	<35mA @ <1mW <40mA @ <3mW <65mA @ <7mW
4	Output Power	<1mW, <3mW, <7mW
5	Collimating Lens	Plastic or Glass
6	Divergence (Full angle) *	<0.5mrad, <1mrad or customized
7	Spot Size at 10m	5mm, 10mm, or customized
8	Operation Temperature **	-10°C ~ +50°C
9	Storage Temperature	-40°C ~ +85°C
10	Dimension ***	Diameter: >8mm Length using glass lens: >18mm Length using plastic lens: >15mm
11	Housing	Brass or Anodized Aluminum
12	Mean time to failure(MTTF) 25 °C	5000hrs, 10000hrs

* Smaller divergence means smaller spot size, longer laser module length

** 60°C operation temperature product is available with 2~3 times price.


*** Φ9x19mm(glass lens) and Φ9x15mm(plastic lens) is built in stock for quick delivery



635nm Laser Module

<1mW, <5mW, <10mW

Red laser, Spot beam, PCB sealed with epoxy

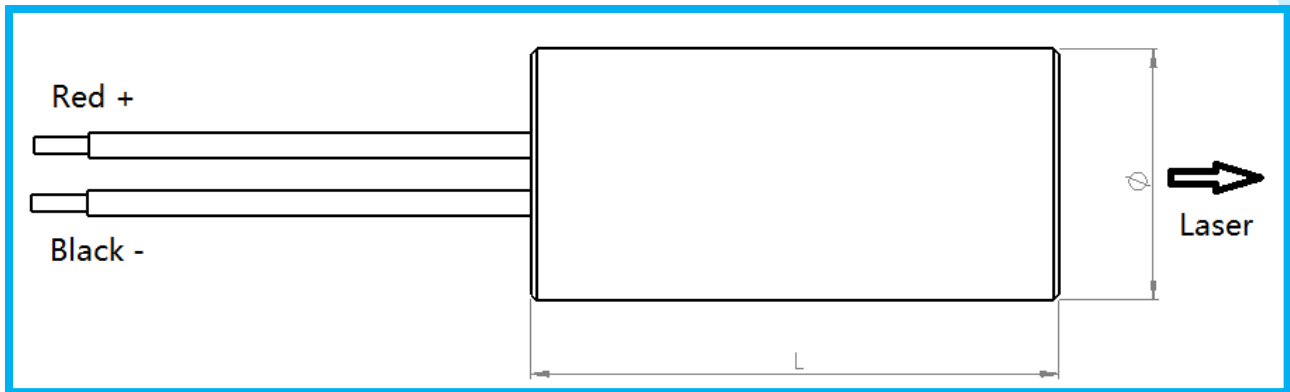

Standard Products:

Part Number	Description
LDM635-1-9-15-P-1-10	635nm, spot laser, <1mW, Φ 9x15mm, Plastic lens
LDM635-3-9-15-P-1-10	635nm, spot laser, <3mW, Φ 9x15mm, Plastic lens
LDM635-1-9-19-G-1-10	635nm, spot laser, <1mW, Φ 9x19mm, glass lens
LDM635-3-9-19-G-1-10	635nm, spot laser, <3mW, Φ 9x19mm, glass lens

Cautions

- Do not operate the device above the maximum rating condition, even momentarily. It may cause unexpected permanent damage to the device
- Semiconductor laser device is very sensitive to electrostatic discharge. High voltage spike current may change the characteristics of the device, or malfunction at any time during its service period. Therefore, proper measures for preventing electrostatic discharge are strongly recommended.



Z-OPTICS LIMITED

12# Qiao Xia Nan Road, Bei Bai Xiang, Yue Qing,
Zhejiang Province, 325603 P. R. China

Tel: +86-577-8181-0885,

Web site: www.z-optics.com

E-mail: sales@z-optics.com